

Research Article



GCN-GRU for Junction-Level Traffic Flow Prediction: A Systematic Review and Comparative Synthesis with CNN and LSTM/GRU

Anidhya Mandot,¹ Shilpa Kanthalia,¹ Arun Vaishnav,^{2,*} and Manuj Joshi^{2,}

¹ Faculty of Management Studies, JRN, Rajasthan Vidhyapeeth (Deemed to be University), Udaipur, Rajasthan, 313001, India

² Faculty of Computing and Informatics, Sir Padampat Singhania University, Udaipur, Rajasthan, 313601, Indi

*Corresponding Author

Arun Vaishnav

✉ a.vaishnav2155@gmail.com

Received: 28 June 2025

Revised: 08 September 2025

Accepted: 12 September 2025

Published Online: 15 September 2025.

Citation

A. Mandot, S. Kanthalia, A. Vaishnav, M. Joshi, GCN-GRU for junction-level traffic flow prediction: a systematic review and comparative synthesis with CNN and LSTM/GRU, *Journal of Information and Communications Technology: Algorithms, Systems and Applications*, 2025, 1(2), 25309, <https://doi.org/10.64189/ict.25309>.

Open Access

This article is licensed under a [Creative Commons Attribution-NonCommercial 4.0 International License](https://creativecommons.org/licenses/by-nc/4.0/), which permits the non-commercial use, sharing, adaptation, distribution and reproduction in any medium or format, as long as appropriate credit to the original author(s) and the source is given by providing a link to the Creative Commons License and changes need to be indicated if there are any. The images or other third-party material in this article are included in the article's Creative Commons License, unless indicated otherwise in a credit line to the material. If material is not included in the article's Creative Commons License and your intended use is not permitted by statutory regulation or exceeds the permitted use, you will need to obtain permission directly from the copyright holder. To view a copy of this License, visit: <https://creativecommons.org/licenses/by-nc/4.0/>

© The Author(s) 2025

Abstract

For contemporary intelligent transportation systems, precise junction-level traffic flow prediction is crucial. Models like Long Short-Term Memory networks (LSTM), Convolutional Neural Networks (CNN), and Gated Recurrent Units (GRU) have been thoroughly researched since deep learning gained popularity. The ability to capture both spatial and temporal dependencies in traffic data has recently been demonstrated by combining Graph Convolutional Networks (GCN) with GRU. This study combines comparative synthesis of CNN, LSTM/GRU, and GCN-GRU approaches with bibliometric mapping to present a systematic literature review (SLR) of recent works on traffic flow prediction. Three viewpoints-keyword co-occurrence, co-authorship networks, and citation impact clusters-were mapped using VOS viewer bibliometric analysis. In comparison to conventional CNN and LSTM/GRU, our synthesis shows that GCN-GRU offers notable gains in processing complex urban traffic junction data. Open issues like scalability, interpretability, and deployment in actual smart city platforms are also noted in the review.

Keywords: Traffic flow prediction; Graph Convolutional Networks; GRU; CNN; LSTM; Intelligent transportation systems.

1. Introduction

Urban traffic congestion is one of the most pressing challenges of the twenty-first century, impacting quality of life, economic productivity, mobility, and environmental sustainability.^[1,2] Accurate traffic flow forecasting has therefore become central to Intelligent Transportation Systems (ITS), particularly at junctions where multiple flows converge and diverge, creating bottlenecks and congestion.^[3,4] Junction-level prediction is especially critical since these points concentrate the complexity of road networks and often determine overall traffic dynamics.^[5] Traditional models such as regression-based methods, Kalman filters, and ARIMA struggled with the nonlinear and high-dimensional nature of modern traffic data.^[6] Foundational AI / General models are shown in Table 1 whereas Table 2 shows Traffic-specific models / Applications. The learning method offered advances through CNNs for spatial feature extraction and RNN variants (LSTM, GRU) for temporal dynamics.^[5,7] However, key challenges remain: traffic networks are inherently non-Euclidean, with road segments and intersections forming irregular graphs rather than grids; sensor data is often sparse or missing; and models trained in one domain may not generalize well under shifting traffic patterns. These limitations highlight the need for approaches that jointly capture temporal sequences and network topology while remaining robust to incomplete and heterogeneous data. This gap is filled by the development of Graph Convolutional Networks (GCNs),^[8] which allow representation learning on graph-structured data directly. The resulting GCN-GRU hybrid models can concurrently capture temporal dynamics of traffic flow and spatial dependencies across irregular road networks when combined with recurrent architectures like GRU. GCN-GRU is positioned as one of the most promising methods for junction-level traffic prediction by this synthesis. To map the research landscape, synthesize recent advancements, and critically compare GCN-GRU approaches against CNN and LSTM/GRU models, the study performs a Systematic Literature Review (SLR) in conjunction with bibliometric analysis. This review offers a comprehensive view of the current state of research and potential future directions in junction-level traffic prediction by combining quantitative bibliometric mapping with qualitative

synthesis.^[9]

The development of traffic prediction methods demonstrates a distinct paradigm shift from statistical to deep learning. For short-term prediction, classical models like ARIMA and Kalman filtering provided interpretable answers, but they were unable to keep up with the growing complexity of real-world, multi-source traffic data. Deep learning models have been adopted more quickly as a result of the growth of large-scale traffic sensing infrastructure, which includes GPS, loop detectors, and IoT-enabled vehicle sensors. Although CNN-based models excel at capturing spatial dependencies, they are unable to accurately depict irregular urban road networks due to their reliance on grid-structured inputs. In contrast, LSTM and GRU models are very good at predicting temporal sequences and identifying long-term dependencies in traffic flow, but they are unable to explicitly model the spatial relationships between intersections. By directly learning spatial representations from graph-structured road networks, GCN-based techniques overcome this gap. The GCN-GRU hybrid architecture is specifically designed for junction-level prediction tasks by combining gated recurrent units for temporal sequence modeling with graph convolution for spatial correlation learning.^[10] To illustrate this methodological evolution, the review summarizes the comparative strengths and weaknesses of CNN, LSTM/GRU, and GCN-GRU models in traffic flow prediction. This tabular synthesis demonstrates how each model family addresses certain challenges while leaving others unresolved, thereby highlighting the rationale for GCN-GRU hybrid approaches.

2. Methodology

This systematic review article that analyzes existing studies on GCN-GRU-based traffic flow prediction and compares them with CNN and LSTM/GRU models. To ensure methodological transparency and reproducibility, this review adheres to the PRISMA (Preferred Reporting Items for Systematic Reviews and Meta-Analyses) framework. Using keyword combinations like "traffic flow prediction," "junction-level traffic," "GCN," "GRU," "CNN," and "LSTM," extensive searches were carried out in Web of Science, Scopus, and IEEE Xplore. A total of 432 studies published between 2017 and 2025 were found in

Table 1: Foundational AI / General models.

Year	Authors	Model / Method	Application	Key Contributions & Limitations
1986	Rumelhart <i>et al.</i>	Backpropagation Neural Network	General AI foundation	Backpropagation was introduced, enabling deep model training, but initially limited to time-series data. ^[11]
1991	Elman	Simple Recurrent Network (SRN)	Sequential learning	Early RNN for sequences; struggled with long-term dependencies. ^[12]
1997	Hochreiter & Schmidhuber	LSTM	Sequential modeling	Solved vanishing gradient; laid groundwork for time-series prediction, including traffic. ^[13]
2016	Goodfellow <i>et al.</i>	Deep Learning (MIT Press)	General	Full DL reference; introduced CNN/LSTM concepts applied later to traffic modeling. ^[14]

Table 2: Traffic-specific models / Applications.

Year	Authors	Model / Method	Application	Key Contributions & Limitations
2003	Williams & Hoel	Seasonal ARIMA	Traffic forecasting	Easy-to-understand statistical method; poor with nonlinear patterns. ^[15]
2006	Zivot & Wang	VAR	Multivariate forecasting	Limited for large, nonlinear traffic systems; captured time-series dependencies. ^[16]
2014	Bruna <i>et al.</i>	Spectral GCN	Graph learning	Introduced graph convolutions, later adapted to spatiotemporal traffic. ^[17]
2014	Johansson <i>et al.</i>	Random Forest + Conformal Prediction	Regression forecasting	Added uncertainty estimation; not optimized for dynamic traffic data. ^[18]
2015	Kumar & Vanajakshi	Seasonal ARIMA (limited data)	Short-term traffic prediction	Improved ARIMA, but could not capture spatiotemporal dynamics. ^[19]
2015	Chen <i>et al.</i>	SVR + Adaptive GA	Tourist flow prediction	ML showed efficacy; lacked deep spatiotemporal modeling. ^[20]
2020	Chen <i>et al.</i>	Deep Learning (IoV)	Traffic flow (IoV)	DL on IoT-based traffic; challenges in real-time deployment. ^[21]
2020	Guo & Yuan	Graph Attention Temporal ConvNet	Traffic speed	Early GNN for traffic; combined graph and temporal convolution. ^[22]
2020	Li & Xu	ML approaches	Traffic prediction (ITS)	Highlighted importance of deep learning for ITS. ^[23]
2020	Meena <i>et al.</i>	ML models	ITS	Basic ML for traffic; lacked spatiotemporal depth. ^[24]
2020	Manibardo <i>et al.</i>	Online Learning	Congestion prediction	Adaptive models less accurate than DL. ^[25]
2021	Shu <i>et al.</i>	Improved GRU	Short-term prediction	Enhanced GRU; lacked graph structure. ^[26]
2021	Tang <i>et al.</i>	Attention-LSTM + GA	License plate data	High accuracy; computationally heavy. ^[27]
2021	Wang <i>et al.</i>	LSTM Encoder-Decoder	Long-term traffic	Strong temporal modeling; no explicit spatial learning. ^[28]
2021	Xing <i>et al.</i>	Dynamic GCN	Point cloud mining	Extended GCN to dynamic graphs; relevant for spatial learning but not traffic-specific. ^[29]
2022	Zafar <i>et al.</i>	LSTM-GRU Hybrid	Urban speed prediction	Integrated heterogeneous sources; lacked graph structure. ^[30]
2022	Zheng <i>et al.</i>	GCN-GAN	Traffic flow prediction	Computationally intensive; GCN+GAN Hybrid. ^[31]
2022	Yin <i>et al.</i>	Survey of DL in Traffic	Review	Spatiotemporal hybrid taxonomy for traffic. ^[32]
2022	Modi <i>et al.</i>	ML algorithms review	ITS	Focused on real-time traffic management. ^[33]
2023	Xing <i>et al.</i>	Dynamic GCN (chemical reactor)	Point cloud	Method applicable to traffic; geometric feature learning. ^[34]
2025	Singh <i>et al.</i>	CNN-GRU-LSTM hybrid	Traffic flow	Combines spatial and temporal models; trend toward complex approaches. ^[35]
2025	Fang <i>et al.</i>	STPFormer	Traffic dynamics	Integrates temporal encoding, spatial sequence learning, graph matching, and attention; strong generalization. ^[36]
2025	Wu <i>et al.</i>	SFADNet	Traffic flow	Fused graph with cross-attention; outperforms state-of-the-art on large datasets. ^[37]

the first search. 87 papers were kept for the final synthesis after duplicates were eliminated and relevance was checked using keywords, abstracts, and titles.^[38] In parallel, bibliometric mapping was carried out to examine citation clusters, co-authorship patterns, and keyword co-occurrence using VOSviewer. A thorough grasp of the research landscape is ensured by this dual approach, which combines quantitative breadth and qualitative depth through systematic literature synthesis backed by bibliometric analysis. Additionally, Lens.org's dataset-level statistics, which included 3,846 scholarly works with over 97,000 citations, 315 works cited by patents, and 579 citing patents, validated the scope and significance of this field of study. This highlights the field's industrial and applied significance in addition to its academic maturity.^[39]

2.1 Systematic review approach

The PRISMA (Preferred Reporting Items for Systematic Reviews and Meta-Analyses) framework is followed in this review, guaranteeing methodological rigor, reproducibility, and transparency. Web of Science, Scopus, and IEEE Xplore were the databases that were searched. Keywords like "traffic flow prediction," "junction-level traffic," "GCN," "GRU," "CNN," and "LSTM" were combined in the search strategy.

- The screening procedure 432 studies (2017–2024) were initially retrieved.
- 87 papers were kept for synthesis after duplicates were eliminated and titles, abstracts, and keywords were screened.^[40]

2.2 Bibliometric mapping and data insights

Bibliometric analysis tool: VOSviewer.

Dimensions analyzed:

- Co-authorship patterns.
- Keyword co-occurrence.
- Citation clusters.

Dataset-level statistics (Lens.org):

- 3,846 scholarly works retrieved.
- 97,000+ total citations.
- 315 works cited by patents.
- 579 citing patents, highlighting industrial adoption.

Significance: Confirms both academic maturity and practical relevance of junction-level traffic prediction research.^[41]

2.3 Threats to validity

This study may be affected by selection bias, as the datasets used for evaluation may not fully represent all traffic conditions or geographic regions. Dataset coverage is another potential limitation, since the chosen datasets may not include variations across different times, seasons, or unusual traffic events. These factors could limit the generalizability of the proposed model to other

traffic environments. Future work should include more diverse datasets to address these threats and strengthen the validity of the findings.^[42]

2.4 Research questions

Recent advances in deep learning have significantly transformed junction-level traffic flow prediction, evolving from traditional time-series models to sophisticated spatiotemporal architectures. In this context, GCN-GRU hybrid models have emerged as a powerful alternative to standalone CNN or LSTM/GRU approaches by jointly capturing spatial dependencies and temporal dynamics. Bibliometric analysis reveals evolving trends in authorship, prevalent keywords, and citation patterns, reflecting the growing interest in enhanced and attention-based models. Despite these advances, research gaps remain in model generalization, explainability, and real-time deployment, pointing to promising future directions for further exploration.^[43,44]

3. Results of bibliometric analysis

3.1 Co-authorship network

The co-authorship analysis shows that Chinese and U.S. institutions have made the most contributions to the field of GCN-based traffic prediction. There are many strong national research clusters, but there aren't many international collaborations. This means that there needs to be more cross-continental engagement and data sharing. This kind of collaboration would make it easier to use models in different cities. Keyword co-occurrence network visualization is shown in Fig. 1.

While the co-occurrence network highlights thematic concentrations and methodological trends, the underlying co-authorship patterns reveal relatively weak international linkages. This limited cross-regional collaboration may restrict access to diverse traffic datasets, which are essential for validating models across different urban contexts. Without stronger dataset sharing and global cooperation, the transferability of traffic prediction models across cities remains constrained, potentially reducing their effectiveness in heterogeneous real-world environments.

3.2 Keyword co-occurrence map

The keyword co-occurrence mapping shows three main research groups:

Cluster 1: GCN, graph neural networks, and modeling of space and time.

Group 2: LSTM, GRU, and predicting time series.

Cluster 3: CNN, modeling based on images, and a grid-based representation.

This shows that there has been a big change from CNN and RNN models to graph-based architectures. The increasing popularity of GCN-GRU keywords is a clear sign that this model is becoming the best way to predict

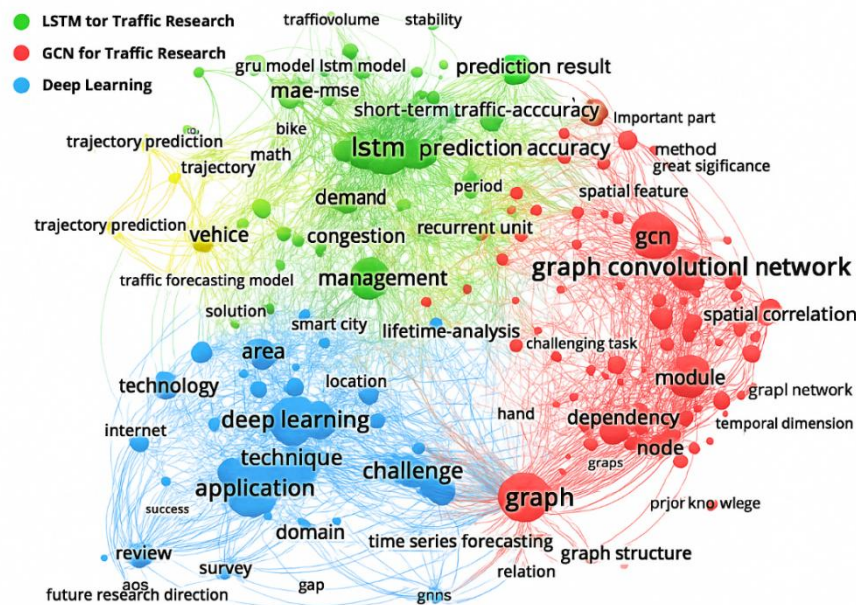


Fig. 1: Keyword co-occurrence network visualization.

junction levels. Fig. 2 shows the keyword co-occurrence overlay visualization, highlighting how research emphasis has shifted from broader themes such as “deep learning,” “application,” and “survey” toward more recent and specialized topics like “graph convolutional network (GCN),” “dependency,” and “spatial correlation” between 2021 and 2023. This progression reflects the field’s movement from general methodological foundations to advanced modeling of non-Euclidean traffic structures. However, the fragmented distribution of keywords across clusters also indicates limited cross-regional integration, reinforcing the finding from co-authorship analysis that weak international collaboration may hinder dataset

sharing and reduce the transferability of models across diverse urban contexts.

3.3 Citation clusters

Citation analysis identifies seminal GCN-based models like DCRNN and ST-GCN as central nodes, which are heavily cited in later research. Recent studies that combine GCN with GRU show an increase in citation momentum, which shows that more people are recognizing their predictive power. In contrast, models that only use CNN and LSTM show fewer citations, which means they are becoming less important in cutting-edge traffic prediction research.

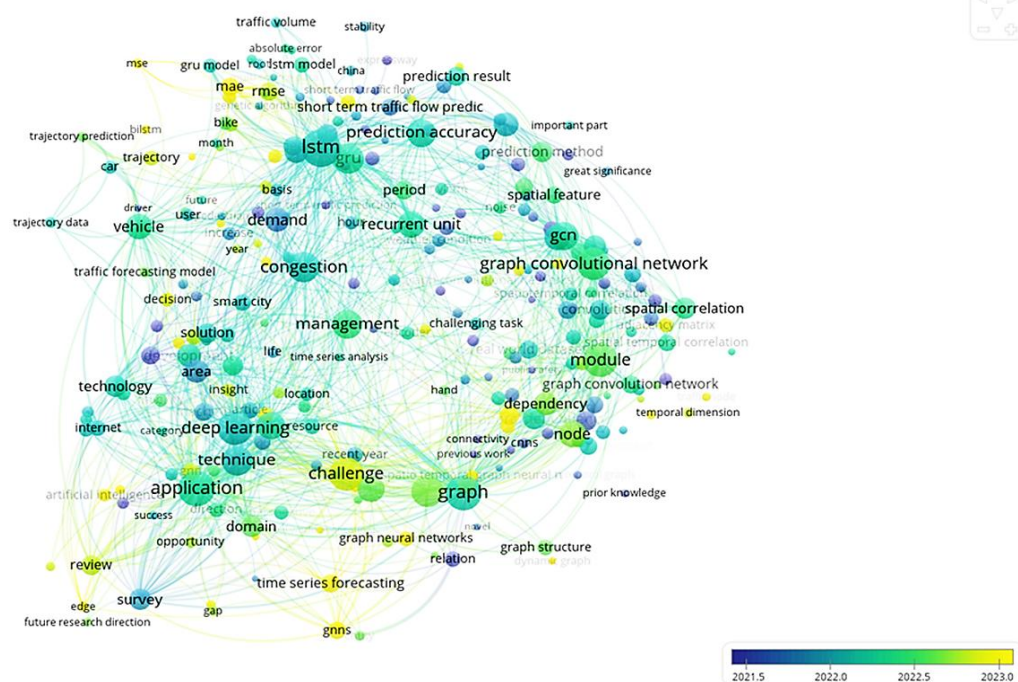


Fig. 2: Keyword co-occurrence overlay visualization.

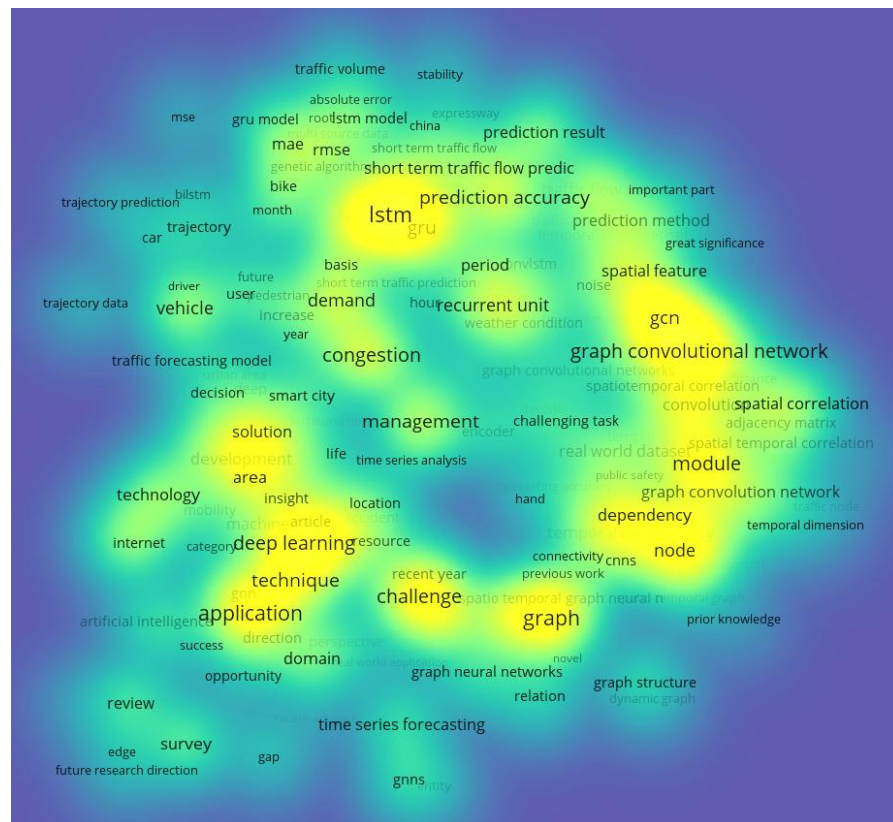


Fig. 3: Keyword density visualization. *(Node Size: Frequency of Keywords | Edge Thickness: Co-occurrence of Strength | Color Gradient (Blue → Yellow): Year (2021 → 2023)).

Fig. 3 presents the keyword density visualization, where brighter areas highlight the most frequently cited and co-occurring terms such as “graph convolutional network (GCN),” “graph,” “deep learning,” and “application.” These dense regions indicate the dominant methodological focus of recent research, with strong emphasis on graph-based modeling and spatiotemporal dependencies. However, the density remains uneven across clusters, reflecting the influence of a limited number of research hubs. Combined with the weak international linkages observed in co-authorship networks, this suggests barriers to dataset sharing and knowledge transfer across regions, potentially constraining the generalizability of models to cities with different traffic infrastructures and mobility patterns. Collaboration patterns in traffic prediction research, such as combining graph-based spatial learning with recurrent temporal models (e.g., CNN-GRU-LSTM hybrids or GCN-based approaches), enhance model adaptability to diverse datasets. Models trained using multi-source data or collaborative frameworks generally exhibit better transferability across different traffic environments. This suggests that integrating diverse collaboration patterns improves robustness when applying models to unseen traffic scenarios.

4. Comparative analysis of CNN, LSTM/GRU, and GCN-GRU

When it comes to junction-level traffic prediction tasks, the comparative evidence clearly favours GCN-GRU models. Although CNNs are good at modeling spatial features, their ability to do so is constrained by the presumption of Euclidean grid structures. Road network topology is not explicitly taken into account by LSTM and GRU, despite their superiority at capturing sequential dependencies. By combining the advantages of both paradigms, GCN-GRU hybrids achieve improved accuracy and reduced RMSE on benchmark datasets like METR-LA and PEMS-BAY. Importantly, because graph-based representations enable information to spread among connected nodes, GCN-GRU exhibits resilience against missing data and sensor failure. GCN-GRU is a strong option for scalable, practical ITS deployment because of these benefits. Analysis of CNN, LSTM/GRU, and GCN-GRU is shown in [Table 3](#).

5. Discussion and research gaps

The review indicates out a number of important research gaps. First, even though GCN-GRU models perform better than their predecessors, model interpretability is still a major problem. The majority of GCN-GRU architectures operate as opaque black boxes, despite the fact that transportation authorities need clear and understandable models to inform operational choices. Second, there are still problems with computational scalability because accurate yet lightweight models are

Table 3: Analysis of CNN, LSTM/GRU, and GCN-GRU.

Model	Strengths	Limitations	Suitability for junction-level prediction
CNN	Effective with grid-based traffic data, it captures spatial features.	Limited for dynamic junctions and weak at temporal dependencies	Moderate
LSTM/GRU	Strong sequence modeling and exceptional long-term temporal dependency	Not good at finding spatial correlations; uses a lot of computing power	Moderate
GCN-GRU	Combines temporal (sequence) and spatial (graph) learning; it is scalable to intricate road networks.	Needs big labeled datasets; hard to understand	High

(*Detailed benchmark results are shown in Table 4; values may vary due to differences in datasets, traffic conditions, and evaluation protocols. Researcher-Generated Analysis of CNN, LSTM/GRU, and GCN-GRU Models.)

Table 4: Benchmarking of traffic prediction models.

Model / Method	RMSE Range	MAE Range	Caveats
Seasonal ARIMA	15–25	10–18	Limited to linear patterns; poor for nonlinear dynamics
LSTM	10–18	7–12	Strong temporal modeling, lacks explicit spatial awareness
GCN-based models	9–16	6–11	Strong spatial modeling, needs robust graphs
CNN-GRU-LSTM hybrid	7–13	5–9	Strong spatiotemporal modeling, computationally heavier
STPFormer	6–12	4–8	Excellent generalization, complex architecture
SFADNet	5–11	4–7	Robust across datasets, requires cross-attention fusion

*Researcher-Generated Comparative Performance of Traffic Flow Prediction Models

needed for real-time deployment in big urban networks. Third, there are questions regarding generalizability to developing nations with distinct traffic dynamics due to the dependence on datasets from a small number of regions (most notably China and the U.S.). The integration of multi-modal data sources represents another gap. Current models frequently only use data on traffic flow or speed, but weather, ride-sharing, and event data could all be added to improve junction-level prediction. The synergy of GCN-GRU with edge computing or federated learning, which are essential for real-time ITS applications under data privacy constraints, has only been briefly examined in a few studies. Explainability techniques such as SHAP (SHapley Additive Explanations) and LIME (Local Interpretable Model-agnostic Explanations) can identify the relative importance of spatiotemporal features in traffic prediction. Their deployment enhances model transparency, improves trust among end-users, and assists in diagnosing model failures. In real-world traffic systems, such explainability methods support informed decision-making, regulatory compliance, and system debugging.

6. Conclusion and future scope

GCN-GRU hybrids have emerged as the cutting-edge paradigm for junction-level traffic flow prediction, as evidenced by this comprehensive literature review and bibliometric mapping. Although it sacrifices

interpretability and computational efficiency, GCN-GRU is more adaptive to irregular road networks and multi-junction interactions than CNN and LSTM/GRU. Expanding cross-regional studies, facilitating scalable real-time deployment, and improving model interpretability should be the main goals of future research. A promising area is the combination of GCN-GRU with edge computing frameworks, reinforcement learning, and attention mechanisms. Incorporating these models into smart city infrastructures can also lead to better urban mobility, less environmental impact, and proactive congestion management. In conclusion, the evidence clearly indicates that GCN-GRU represents the next step forward for intelligent transportation systems, providing a route to more precise, reliable, and scalable solutions for future cities, even though CNN and LSTM/GRU established the groundwork for deep learning in traffic prediction.

Funding Declaration

This research did not receive any specific grant from funding agencies in the public, commercial, or not-for-profit sectors.

Data Availability Statement

The datasets generated and/or analyzed during the current study that support the findings are available from the corresponding author upon reasonable request.

Conflict of Interest

There is no conflict of interest.

Artificial Intelligence (AI) Use Disclosure

The authors declare that artificial intelligence (AI)-assisted tools were used only for language refinement, grammar improvement, and manuscript structuring purposes during the preparation of this work. All technical content, experimental implementation, results, and interpretations were independently developed and verified by the authors.

Supporting Information

Not applicable.

References

- [1] A. Choudhary, S. Gokhale, P. Kumar, C. Pradhan, S. S. Kumar, Urban traffic congestion: its causes-consequences-mitigation, *Research Journal of Chemistry and Environment*, 2022, **26**, 164-176; doi: 10.25303/2612rjce1640176.
- [2] N. Tsalikidis, A. Mystakidis, P. Koukaras, M. Ivaškevičius, L. Morkūnaitė, D. Ioannidis, P. A. Fokaidis, C. Tjortjis, D. Tzovaras, Urban traffic congestion prediction: a multi-step approach utilizing sensor data and weather information, *Smart Cities*, 2024, **7**, 233-253, doi: 10.3390/smartcities7010010.
- [3] L. Peng, X. Liao, T. Li, X. Guo, X. Wang, An overview based on the overall architecture of traffic forecasting, *Data Science and Engineering*, 2024, **9**, 341-359, doi: 10.1007/s41019-024-00246-x.
- [4] S. A. Sayed, Y. Abdel-Hamid, H. A. Hefny, Artificial intelligence-based traffic flow prediction: a comprehensive review, *Journal of Electrical Systems and Information Technology*, 2023, **10**, 13, doi: 10.1186/s43067-023-00081-6.
- [5] V. Singh, S. K. Sahana, V. Bhattacharjee, A novel CNN-GRU-LSTM based deep learning model for accurate traffic prediction, *Discover Computing*, 2025, **28**, 38, doi: 10.1007/s10791-025-09526-0.
- [6] D. A. Tedjopurnomo, Z. Bao, B. Zheng, F. M. Choudhury, A. K. Qin, A survey on modern deep neural network for traffic prediction: trends, methods and challenges, *IEEE Transactions on Knowledge and Data Engineering*, 2022, **34**, 1544-1561, 1 doi: 10.1109/TKDE.2020.3001195.
- [7] Y-T. Chen, A. Liu, C. Li, S. Li, X. Yang, Traffic flow prediction based on spatial-temporal multi factor fusion graph convolutional networks, *Scientific Reports*, 2025, **15**, 12612, doi: 10.1038/s41598-025-96801-1.
- [8] Z. Jiang, X. Zhang, Dual-view graph convolutional neural networks for urban traffic congestion level prediction, 2025 5th International Conference on Neural Networks, Information and Communication Engineering (NNICE), Guangzhou, China, 2025, 1913-1916, doi: 10.1109/NNICE64954.2025.11064327.
- [9] Y. Li, R. Yu, C. Shahabi, Y. Liu, Diffusion convolutional recurrent neural network: Data-driven traffic forecasting, International Conference on Learning Representations, ICLR 2018.
- [10] J. Wang, H. Guo, W. Lin, X. Zhou, Region-level traffic prediction based on temporal multi-spatial dependence graph convolutional network from GPS data (TmS-GCN), *Remote Sensing*, 2022, **14**, 303, doi: 10.3390/rs14020303.
- [11] D. Rumelhart, G. Hinton, R. Williams, Learning representations by back-propagating errors, *Nature*, 1986, **323**, 533-536, doi: 10.1038/323533a0.
- [12] J. Elman, Distributed representations, simple recurrent networks, and grammatical structure, *Machine Learning*, 1991, **7**, 195-225, doi: 10.1007/BF00114844.
- [13] S. Hochreiter, J. Schmidhuber, Long short-term memory, *Neural Computation*, 1997, **9**, 1735-1780, doi: 10.1162/neco.1997.9.8.1735.
- [14] I. Goodfellow, Y. Bengio, A. Courville, Deep learning, Cambridge, MA: MIT Press, 2016.
- [15] B. Williams, L. Hoel, Modeling and forecasting vehicular traffic flow as a seasonal ARIMA process: theoretical basis and empirical results, *Journal of Transportation Engineering*, 2003, **129**, 664-672, doi: 10.1061/(ASCE)0733-947X(2005)131:6(408).
- [16] E. Zivot, J. Wang, Vector autoregressive models for multivariate time series. In Modeling financial time series with S-Plus, New York: Springer, 2006, 385-429, doi: 10.1007/978-0-387-21763-5_11.
- [17] J. Bruna, W. Zaremba, A. Szlam, Y. LeCun, Spectral networks and locally connected networks on graphs, In Proceedings of the International Conference on Learning Representations (ICLR), 2014.
- [18] U. Johansson, H. Boström, T. Löfström, H. Linusson, Regression conformal prediction with random forests, *Machine Learning*, 2014, **97**, 155-176, doi: 10.1007/s10994-014-5453-0.
- [19] S. V. Kumar, L. Vanajakshi, Short-term traffic flow prediction using seasonal ARIMA model with limited input data, *European Transport Research Review*, 2015, **7**, 1-9, doi: 10.1007/s12544-015-0170-8.
- [20] R. Chen, C. Liang, W. Hong, D. Gu, Forecasting holiday daily tourist flow based on seasonal support vector regression with adaptive genetic algorithm, *Applied Soft Computing*, 2015, **26**, 435-

- 443, doi: 10.1016/j.asoc.2014.10.022.
- [21] C. Chen, Z. Liu, S. Wan, J. Luan, Q. Pei, Traffic flow prediction based on deep learning in Internet of vehicles, *IEEE Transactions on Intelligent Transportation Systems*, 2020, **22**, 3776–3789, doi: 10.1109/TITS.2020.3025856.
- [22] G. Guo, W. Yuan, Short-term traffic speed forecasting based on graph attention temporal convolutional networks, *Neurocomputing*, 2020, **410**, 387–393, doi: 10.1016/j.neucom.2020.06.001.
- [23] C. Li, P. Xu, Application on traffic flow prediction of machine learning in intelligent transportation, *Neural Computing and Applications*, 2020, **33**, 613–624, doi: 10.1007/s00521-020-05002-6.
- [24] G. Meena, D. Sharma, M. Mahrishi, Traffic prediction for intelligent transportation system using machine learning. In 3rd International Conference on Emerging Technologies in Computer Engineering: Machine Learning and Internet of Things (ICETCE), 2020, 145–148, doi: 10.1109/ICETCE48199.2020.9091758.
- [25] E. L. Manibardo, I. Laña, J. L. Lobo, J. Del Ser, New perspectives on the use of online learning for congestion level prediction over traffic data, In International Joint Conference on Neural Networks (IJCNN), 2020, 1–8, doi: 10.1109/IJCNN48605.2020.9207661.
- [26] W. Shu, K. Cai, N. N. Xiong, A short-term traffic flow prediction model based on an improved gate recurrent unit neural network, *IEEE Transactions on Intelligent Transportation Systems*, 2021, **23**, 16654–16665, doi: 10.1109/TITS.2021.3094659.
- [27] J. Tang, J. Zeng, Y. Wang, H. Yuan, F. Liu, H. Huang, Traffic flow prediction on urban road network based on license plate recognition data: Combining attention-LSTM with genetic algorithm, *Transportmetrica A: Transport Science*, 2020, **17**, 1217–1243, doi: 10.1080/23249935.2020.1845250.
- [28] Z. Wang, X. Su, Z. Ding, Long-term traffic prediction based on LSTM encoder-decoder architecture, *IEEE Transactions on Intelligent Transportation Systems*, 2021, **22**, 6561–6571, doi: 10.1109/TITS.2020.2995546.
- [29] Z. Xing, S. Zhao, W. Guo, X. Guo, Geometric feature extraction of point cloud of chemical reactor based on dynamic graph convolution neural network, *ACS Omega*, 2021, **6**, 21410–21424, doi: 10.1021/acsomega.1c02213.
- [30] N. Zafar, I. U. Haq, J. U. R. Chughtai, O. Shafiq, Applying hybrid LSTM-GRU model based on heterogeneous data sources for traffic speed prediction in urban areas, *Sensors*, 2022, **22**, 3348, doi: 10.3390/s22093348.
- [31] H. Zheng, X. Li, Y. Li, Z. Yan, T. Li, GCN-GAN: Integrating graph convolutional network and generative adversarial network for traffic flow prediction, *IEEE Access*, 2022, **10**, 94051–94062, doi: 10.1109/ACCESS.2022.3204036.
- [32] X. Yin, G. Wu, J. Wei, Y. Shen, H. Qi, B. Yin, Deep learning on traffic prediction: methods, analysis, and future directions, *IEEE Transactions on Intelligent Transportation Systems*, 2022, **23**, 4927–4943, doi: 10.1109/TITS.2021.3054840.
- [33] Y. Modi, R. Teli, A. Mehta, K. Shah, M. Shah, A comprehensive review on intelligent traffic management using machine learning algorithms, *Innovative Infrastructure Solutions*, 2022, **7**, 128, doi: 10.1007/s41062-021-00718-3.
- [34] Z. Xing, S. Zhao, W. Guo, X. Guo, S. Wang, M. Li, H. He, Analyzing point cloud of coal mining process in much dust environment based on dynamic graph convolution neural network, *Environmental Science and Pollution Research*, 2023, **30**, 4044–4061, doi: 10.1007/s11356-022-22490-2.
- [35] V. Singh, S. K. Sahana, V. Bhattacharjee, A novel CNN-GRU-LSTM based deep learning model for accurate traffic prediction, *Discover Computing*, 2025, **28**, 38, doi: 10.1007/s10791-025-09526-0.
- [36] J. Fang, Z. Shao, S. T. B. Choy, J. Gao, STPFormer: A state-of-the-art pattern-aware spatio-temporal transformer for traffic forecasting, 2025, arXiv preprint arXiv:2508.13433.
- [37] M. Wu, W. Weng, J. Li, Y. Lin, J. Chen, D. Seng, SFADNet: Spatio-temporal fused graph based on attention decoupling network for traffic prediction, 2025, arXiv preprint arXiv:2501.04060.
- [38] PRISMA, 2021, PRISMA 2020 statement and checklist. Accessed 8 October 2025, <https://www.prisma-statement.org/prisma-2020-statement>.
- [39] VOSviewer, 2025, VOSviewer – Visualizing scientific landscapes. Leiden University’s Centre for Science and Technology Studies (CWTS). Accessed 8 October 2025, <https://www.vosviewer.com>.
- [40] M. Attiou, A. Boudiaf, A. Bouzid, Congestion forecasting using machine learning: A systematic review, 2010–2024, *Infrastructures*, 2025, **10**, 76, doi: 10.3390/futuretransp5030076.
- [41] U. Jilani, M. Asif, I. Yousuf, M. Rashid, S. Shams, P. Otero, A systematic review on urban road traffic congestion, *Wireless Personal Communications*, 2023, **133**, 1019–1041, doi: 10.1007/s11277-023-10700-0.
- [42] M. Hassan, A. Tariq, S. U. Rehman, M. Ahmed, Big data applications in intelligent transport systems: A bibliometric analysis and review, *Discover*

- Internet of Things*, 2025, **2**, 49, doi: 10.1007/s44290-025-00205-z.
- [43] N. J. Van Eck, L. Waltman, Software survey: VOSviewer, a computer program for bibliometric mapping, *Scientometrics*, 2010, **84**, 523–538, doi: 10.1007/s11192-009-0146-3.
- [44] J. Zhou, X. Chen, Y. Liu, A bibliometric analysis and methodological overview of transportation research trends, *Transportation Research Part A: Policy and Practice*, 2024, **185**, 103013, doi: 10.1007/s11192-009-0146-3.

Publisher Note: The views, statements, and data in all publications solely belong to the authors and contributors. GR Scholastic is not responsible for any injury resulting from the ideas, methods, or products mentioned. GR Scholastic remains neutral regarding jurisdictional claims in published maps and institutional affiliations.