

IRON BALTIC

SCRAPE BLADE

DOWNLOAD MULTILINGUAL
USER MANUAL



code.ironbaltic.com/u/si8ry51D

Receiver mount system

Code 84.3000

Version 08012024




Keep this manual for future reference!

If you need any spare parts, please send this packaging data to your local dealer or to Iron Baltic
sales@ironbaltic.com

Iron Baltic Ltd | +372 653 3711 | sales@ironbaltic.com | www.ironbaltic.com

SPECIFICATION


Pos.	Description	Code	Amount
1	Scrape blade	84.3001K	1
2	Mounting tube short	84.3007S	1
3	Blade 1450 mm	84.3011	1
4	Pin Quicklock	OT.53.00.045	1
5	Pin with chain 1/2" x 3-1/2"	OT.53.01.010	1
6	Carriage bolt M10x30 DIN603	OT.02.05.110	7
7	Bolt M16x100 DIN931	OT.02.01.150	1
8	Washer Ø10 DIN125	OT.04.01.040	7
9	Washer Ø16 DIN125	OT.04.01.060	2
10	Nyloc nut M10 DIN985	OT.03.02.050	7
11	Nyloc nut M16 DIN985	OT.03.02.070	1

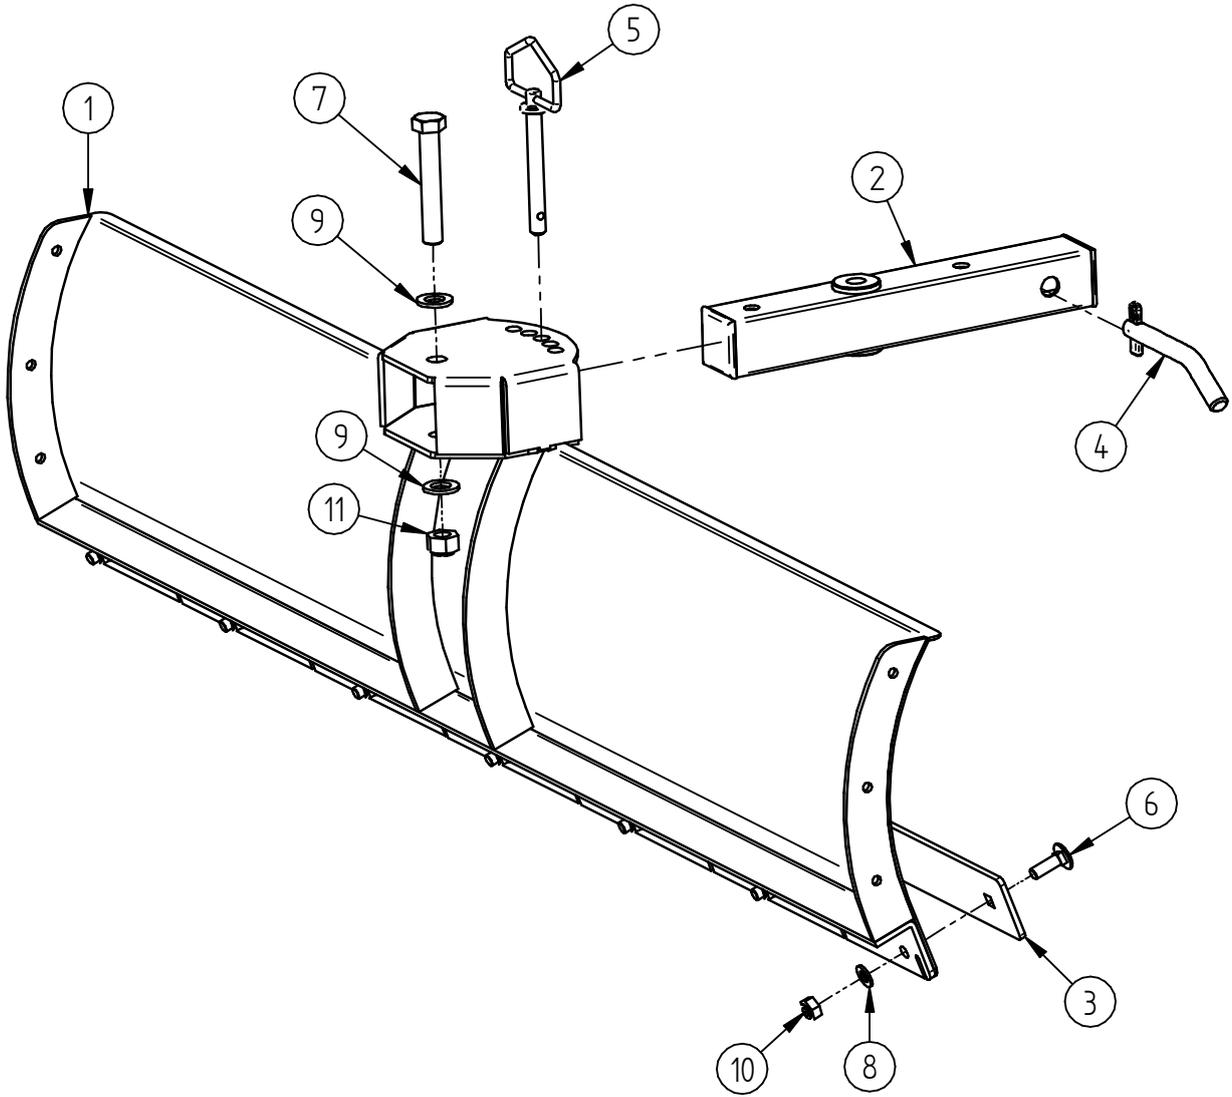

FITTING INSTRUCTIONS


Step 1

Install the blade (Pos.3) to the scrape blade (Pos.1). For fastening use M10x30 carriage bolts (Pos.6), Ø10 washers (Pos.8) and M10 nyloc nuts (Pos.10)

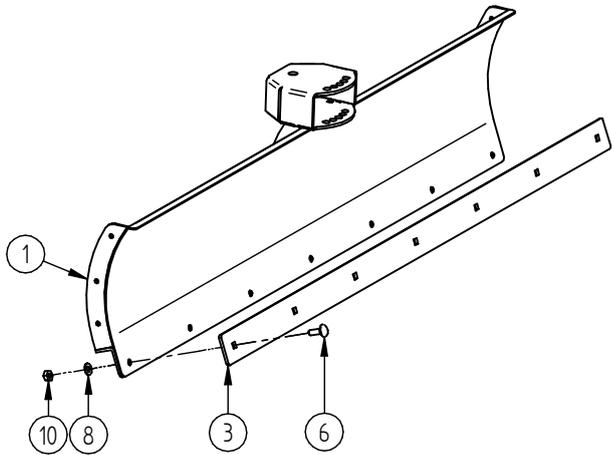

Step 2

Install the mounting tube (Pos.2). Select the position of the mounting tube according to the work to be done (blade can be used to pull the material behind the vehicle and in the turned over position, which means that the blade can be used to push the material when reversing the vehicle). For fastening use M16x100 bolt (Pos.7), Ø16 washers (Pos.9) and M16 nyloc nut (Pos.11). Fix the working angle with the pin (Pos.5).

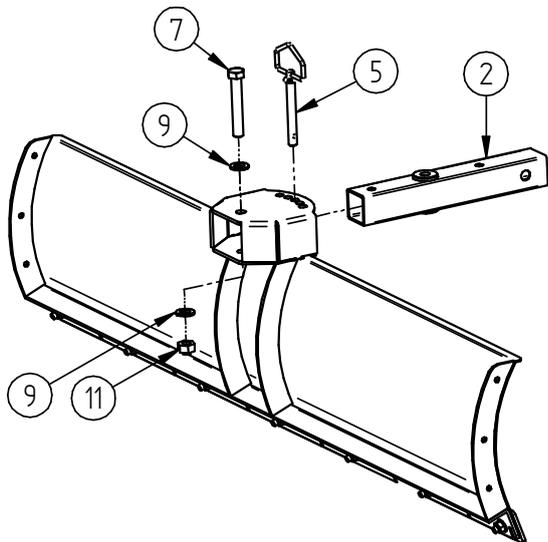

Step 3

Install the scrape blade to the receiver mount system.
For fastening use a pin (Pos.4).



IRON BALTIC

IRON BALTIC OÜ
Joa tee 17
Vääna 76903
Estonia / Europe

+372 6 533 711
sales@ironbaltic.com

www.ironbaltic.com
www.facebook.com/ironbaltic
www.youtube.com/user/ironbalticLtd

